

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 March 2006 (09.03.2006)

PCT

(10) International Publication Number
WO 2006/025577 A1

(51) International Patent Classification:
H04B 1/69 (2006.01) *H04L 1/00* (2006.01)
H04L 1/08 (2006.01)

(72) Inventor; and
(75) Inventor/Applicant (for US only): YAMAMOTO, Nao-
take [JP/JP].

(21) International Application Number:
PCT/JP2005/016204

(74) Agent: HIRANO, Kazuyuki; Hirano Patent Office, 1-23-
203, Tenjin 4-Chome, Chuo-Ku, Fukuoka-Shi, Fukuoka,
8100001 (JP).

(22) International Filing Date: 30 August 2005 (30.08.2005)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
2004-255289 2 September 2004 (02.09.2004) JP

(71) Applicant (for all designated States except US): MAT-
SUSHITA ELECTRIC INDUSTRIAL CO., LTD.
[JP/JP]; 1006, Oaza Kadoma, Kadoma-Shi, Osaka,
5718501 (JP).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: TRANSMITTING METHOD, RECEIVING METHOD, TRANSMITTING DEVICE, RECEIVING DEVICE AND
TRANCEIVING DEVICE

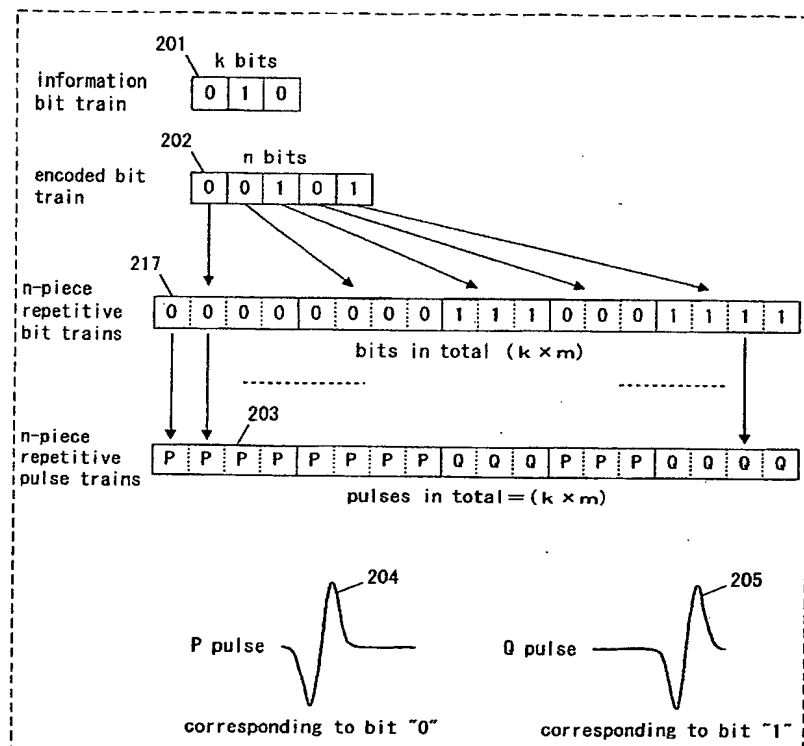

(57) Abstract: A transmitting device of the present invention comprises an encoder (20), a transmitting unit (100) including and a pulse generator (30) and a parallel-to-serial converter (50), a transmitting control unit (40), and an antenna (90). The pulse generator (30) comprises a first pulse train generator (31), a second pulse train generator (32), ... and an n-th pulse train generator (33). A k-bit information bit train is inputted from the information signal source (10). The encoder (20) encodes the k-bit information bit train into an n-bit encoded bit train at a coded rate of (k/n). The pulse generator (30) generates n-piece repetitive pulse trains corresponding to the n-bit encoded bit train. The antenna (90) transmits the n-piece repetitive pulse trains as UWB-IR.

WO 2006/025577 A1